

McNamara, Kayla

From: Mark Gallagher <Mark@nerecgroup.com>
Sent: Thursday, December 08, 2016 6:27 PM
To: McNamara, Kayla
Subject: Haskell Field- PIP Surfacing revised quote
Attachments: Sudbury Park & Rec PIP quote.pdf

Importance: High

Kayla

Per your request, please see the attached revised PIP Surfacing quote from New England Recreation Group for the Haskell Field Playground project.

This quote is based on Prevailing Wage and includes the estimated additional square footage for the center area between the two existing Play Areas #1 and #2.

Please note this quote is based on Play Area #1 & #2 being measured, however, along with the new center space, is subject to change until the final design, site, perimeter, preparation and installation plan/square footage is confirmed.

My suggestion (as I mentioned earlier) would be to prepare and surface the entire remaining areas (1, 2 and Center) at once. This would be your best cost and time saving option as well as eliminate the existing EWF surfacing, site and PIP repair work needed.

Should you have any questions or need any additional information or assistance please do not hesitate to contact me at this address or direct at 508-887-5759.

Thank you once again for your consideration.

Best regards,

Mark Gallagher
New England Rec Group



December 8, 2016

Kayla McNamara
Sudbury Parks and Recreation Department
40 Fairbank Road
Sudbury, MA 01776

Re: Haskell Field-Playground PIP Rubber Surfacing

Dear Kayla:

Per your request, please find enclosed the following Poured In Place (PIP) Rubber Safety Surfacing quote from New England Recreation Group for the remaining two play areas and additional center space between Area 1 & 2 at the Haskell Field Playground (approx. 1000s.f).

Each Area quote is based on supply and install of new PIP per each area separately and is based on a prepared, level and compacted site and sub grade material provided by others.

- AREA #1: Existing 2-5 Play Structure zone (left of center): \$ 37,850.00
- Approx. 3000 s.f, 50/50 standard color/black speckle mix
 - 4' CFH (Critical Fall Height)
- AREA #2: Front Play Area- Existing Ramp Play Structure: \$ 37,850.00
- Approx. 3000 s.f 50/50 standard color/black speckle mix
 - 4' and 6' CFH (1.75" and 2.5" thickness)

OPTION: Both Area #1 & Area #2 w/ center delivered & Installed same mobilization: \$ 70,975.00

NOTE: Please note that our PIP manufacturer cannot guarantee adhesion /install of new PIP over existing PIP by others or repair existing PIP due to warranty and liability concerns and unknown material and base conditions by others at original time of installation. It is our recommendation to remove any and all existing PIP rubber by others/previously installed for maximum new product performance and warranty protection.

P.O. Box 1503
Westboro, MA 01581

P.O. Box 1050
Tolland, CT 06084

800.861.1209
508.393.1963
F 508.393.1927
www.nerecgroup.com
necrg@nerecgroup.com



NOTE: PIP quote square footage is approximate based on existing play equipment/ playground layout and may be subject to change pending final site design, preparation, perimeter and layout/area measurements.

Price is good for 30 days and is based on Prevailing Wage.

Price does not include any applicable tax, site prep, sub base material supply or prep, perimeter edge, permits, bonds, Field Tests for ASTM F1292-09 (if necessary), custom graphics, logos, designs, 100% color, dumpster for PIP trash/ waste material disposal or site security during cure time (48 hours approx.).

Should you have any questions or need additional information please do not hesitate to contact me at 508-887-5759 (cell) or mark@nerecgroup.com.

I appreciate the opportunity to assist you with this project and thank you for your consideration.

Best regards,

Mark Gallagher
Vice President

P.O. Box 1503
Westboro, MA 01581

P.O. Box 1050
Tolland, CT 06084

800.861.1209
508.393.1963
F 508.393.1927
www.nerecgroup.com
nerg@nerecgroup.com

Park & Playground Systems



P.O. Box 1503
Westboro, MA 01581

P.O. Box 1050
Tolland, CT 06084

800.861.1209
508.393.1963
F 508.393.1927
www.nerecgroup.com
nerg@nerecgroup.com

Park & Playground Systems

McNamara, Kayla

From: Mark Gallagher <Mark@nerecgroup.com>
Sent: Thursday, December 08, 2016 3:01 PM
To: McNamara, Kayla
Subject: Haskell Field Playground- PIP Safety Surface edge details "G" & "H" (compacted stone sub-base)
Attachments: DETAIL SHEET G No Fault (1).pdf; DETAIL SHEET H No Fault (1).pdf

Kayla


Please see attached the two standard and most popular PIP Sub Base material and installation spec sheets.

Should you have any questions or need additional information let me know.

Thank you!

Mark Gallagher
New England Recreation Group
800-861-1209

NO FAULT SAFETY SURFACING
DETAIL SHEET "G"
SLOPED SOFT SHOULDER EDGE OVER CONCRETE BASE
ADJACENT TO LOOSE FILL

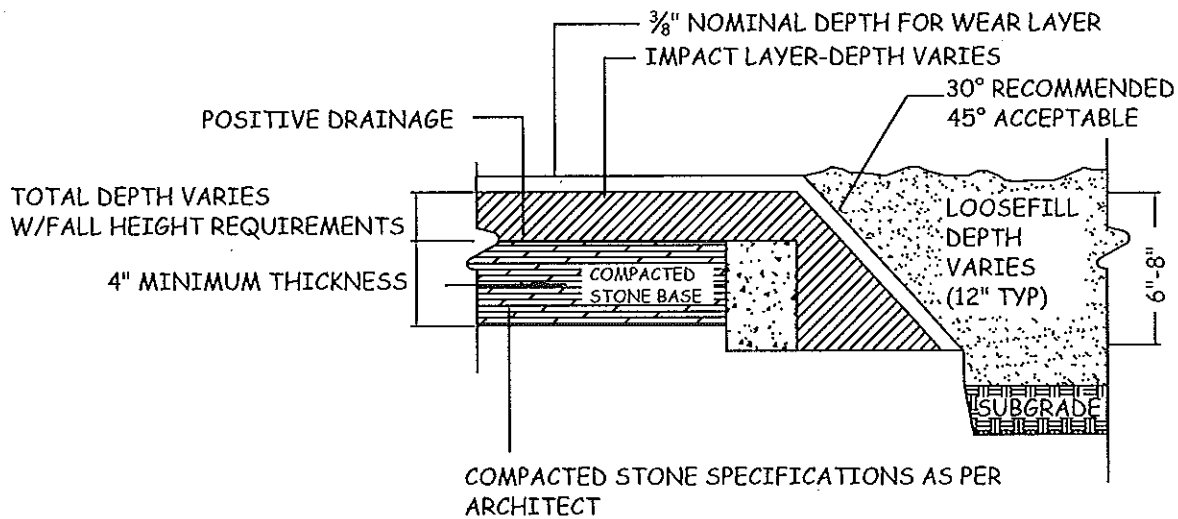

NOT TO SCALE

NOTES:


Loose fill as per manufacturer recommendations to be installed after No Fault Safety Surface installation.

Industry Standard for border 6"-8"; 4"-8" is acceptable.

Soft edge details are not designed to meet ADA requirements.


DISCLAIMER:

No Fault Sport Group LLC reserves the right to modify these edge details at anytime. It is the responsibility of the owner/architect/general contractor to verify the validity of these details.

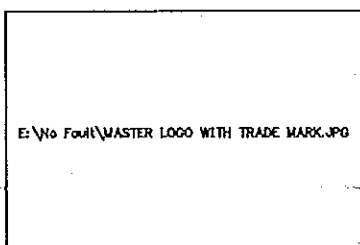

No Fault Sport Group LLC
3112 Valley Creek Drive, Suite C
Baton Rouge, LA 70808
Toll Free: 866-637-7678
www.nofault.com

NO FAULT SAFETY SURFACE
DETAIL SHEET "H"
FIXED BORDER ADJACENT TO GRASS EDGE

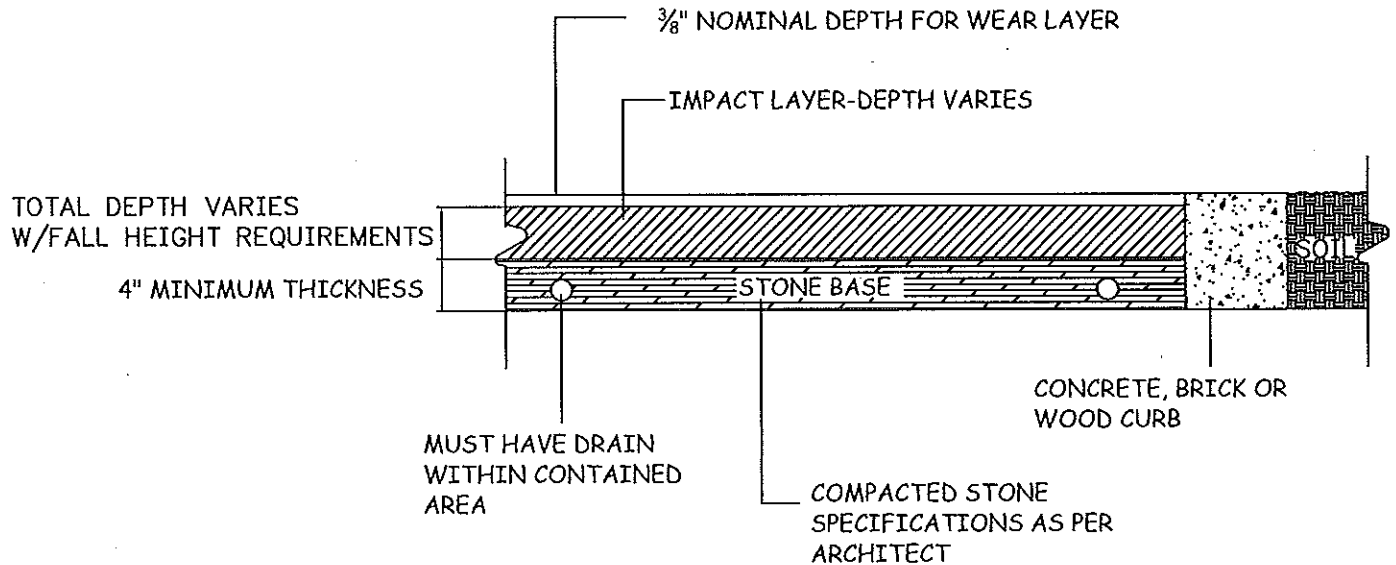

NOT TO SCALE


NOTES:

For compacted stone bases, filter cloth can be laid on top of stone prior to installation of No Fault Safety Surfacing.

Industry Standard for border is 6" to 8"; 4" to 8" is acceptable.

DISCLAIMER:

No Fault Sport Group LLC reserves the right to modify these edge details at anytime. It is the responsibility of the owner/architect/general contractor to verify the validity of these details.

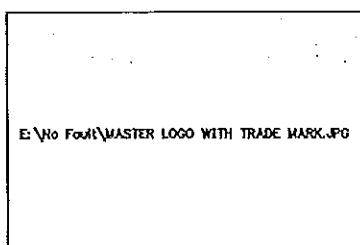

No Fault Sport Group LLC
3112 Valley Creek Drive, Suite C
Baton Rouge, LA 70808
Toll Free: 866-637-7678
www.nofault.com

McNamara, Kayla

From: Mark Gallagher <Mark@nerecgroup.com>
Sent: Thursday, December 08, 2016 2:43 PM
To: McNamara, Kayla
Subject: Haskell Field- PIP RUBBER SPECIFICATION & Warranty
Attachments: NFSS Playground EPDM or TPV - 3-PART AIA (2016).pdf; NFSS TPV 3.5 (8' CFH) ASTM F1292-09.pdf

Kayla

Please see the attached PIP Rubber Specifications and Warranty (5 year) information.

Any questions let me know.

Thank you!

Mark Gallagher
NERG

No Fault Safety Surface & SAF DEK for Playgrounds

Product Specification

By No Fault Sport Group, LLC
2016 All Rights Reserved

All information contained within subject to change without notice

POURED-IN-PLACE RUBBER (EPDM OR TPV) SURFACING FOR PLAYGROUNDS

PART 1 – GENERAL

1.01 WORK INCLUDED

This work includes furnishing and installing the No Fault Safety Surface. The surfacing Manufacturer/installer shall be responsible for all labor, materials, tools, and equipment to perform all work and services for the installation of the surface.

1.02 DESCRIPTION OF SYSTEM & GENERAL CONDITIONS

No Fault Safety Surface shall be poured-in-place and trowelled to provide for a resilient, seamless rubber surface installed over the specified rigid base. No Fault Safety Surface is comprised of an SBR base mat and EPDM or TPV colored cap, with both layers being mixed with a non-flammable, non-shrinking, one part moisture cured polyurethane adhesive as recommended by the Manufacturer and capable of bonding to concrete, asphalt or compacted stone. No Fault Safety Surface shall be stable and slip resistant to comply with, meet or exceed all requirements set forth in the Americans with Disabilities Act (ADA) and the American Standard Testing Methods (ASTM and Consumer Products Safety Commission (CPSC) for manufactured Safety Surfaces as detailed below.

1.03 QUALITY ASSURANCE

A. Test Results

1. Impact Attenuation - ASTM F 1292: Surfacing within playground equipment use zones shall meet or exceed the performance requirements of CPSC, ASTM F 1292 and/or CSA Z614-98 that a surface yield both a peak deceleration of no more than 200 g's and a Head Injury Criteria (HIC) value of no more than 1,000 for a head-first fall from the highest accessible portion of play equipment being installed as shown on drawings. Manufactured Safety Surface: For surfaces manufactured for the purpose of playground safety surface, the impact attenuation performance shall be documented by a certificate of compliance provided by third party at Owner or contractor's expense.
2. Coefficient of Friction - ASTM D2047: All products must meet minimum standard on coefficient of friction of 0.7-wet, 0.9-dry.
3. Surface Frictional Properties & Skid Resistance – ASTM E303: All products shall meet or exceed 90 BPN when tested Dry and 64 BPN when tested wet.
4. Permeability: Product shall meet or exceed a coefficient of permeability of seven (7) feet per minute. NOTE: From a geotechnical standpoint, the permeability of a material is a measure of the velocity at which water will flow through the void spaces or pores under a given hydraulic gradient. The product shall handle a minimum of 8" of rainfall per hour.
5. Flammability of Finished Floor Cover - ASTM D2859: Product shall pass flammability.
6. Accessibility of Surface Systems – ASTM F1951: All playground surfacing products must pass testing to ensure wheelchair access under and around playground equipment as required by the American Disabilities Act.
7. Tear Strength – ASTM D624 Standard Test Method for Tear Strength of Conventional Vulcanized Rubber and Thermoplastic: Tear Resistance must be equal to or greater than 12 pounds per inch.
8. Tensile Strength – ASTM D412 Standard Test Methods for Vulcanized Rubber Elastomers and Thermoplastic Elastomers: Tensile Strength must be equal to or greater than 80 Psi.
9. Solar Reflective Index (SRI) – ASTM C-1959 and E-903
10. IPEMA Certification Required: "In the Interest of playground safety, the International Play Equipment Manufacturers Association (IPEMA) provides a Third Party Certification Service whereby a designated independent laboratory, TÜV SÜD America Inc., (TÜV), validates a surfacing manufacturer's certification of conformance to ASTM F1292, Standard Specification for Impact Attenuation Under and Around Playground Equipment, and for an engineered wood fiber manufacturer its certification of conformance, also to ASTM F2075, Standard Specification for Engineered Wood Fiber for use as a Playground Safety Surface Under and Around Playground Equipment, and Section 4.4, for testing Sieve Analysis and Section 4.6, for testing the

No Fault Safety Surface & SAF DEK for Playgrounds

Product Specification

By No Fault Sport Group, LLC

All information contained within subject to change without notice

2016 All Rights Reserved

presence of Tramp Metal. A list of current validated products, their thickness and critical height may be viewed at www.ipema.org."

B. Installer Qualifications

1. All materials under this section shall be installed by the Manufacturer or its Certified Installers. The playground surfacing installation shall not be performed by anyone other than the product Manufacturer or its Certified Installers.
2. The installation crew will include at least one member that has completed the OSHA 10 Hour Training course and received certification

C. Contractor Pre-Qualifications

1. All bidders must have a current Louisiana Contractor's License at or before the time of bid opening date.
2. A list of twenty five (25) surfacing projects completed with a similar product. List shall include names of project representatives and respective telephone numbers. At least five (5) of these projects must be at least five (5) years old. This list shall also contain projects which require the same level of difficulty, size of project, type of project, e.g. color transitions and special graphics.
3. All bidders must also submit Material Safety Data sheets (MSDS) and Product Data Sheets on all materials.
4. Insurance Requirements - All bidders must carry minimum insurance of:
 - a) \$1,000,000 General Liability Per Occurrence
 - b) \$2,000,000 General Aggregate
 - c) \$2,000,000 Products Completed Operations
 - d) \$5,000,000 Excess Liability
 - e) \$1,000,000 Workers Comp. & Employers Liability
 - f) \$1,000,000 Automobile Liability (any Auto)

1.04 SUBMITTALS

- A. One original hard copy of the submittal package will be supplied with additional copies on individual CD's. Upon request only hard copies shall be supplied.
- B. Manufacturer's descriptive data and installation instructions.
- C. Manufacturer's details showing depths of wear surface and sub-base materials, anchoring systems and edge details.
- D. A list of all materials and components to be installed, including Manufacturer's name, storage requirements, and precautions, and shall state chemical composition and test results to which material has been subjected in compliance with these specifications.
- E. Test results to substantiate that the product meets or exceeds all ASTM & ADA requirements for each standard listed in Section 1.03 Quality Assurance. Test must be performed and certified by an independent laboratory.
- F. Copy of IPEMA Certification.
- G. Documentation of Contractor Pre-Qualification as stated in Section 1.03 Quality Assurance.
- H. Documentation of Insurance Requirements as stated in Section 1.03 Quality Assurance.
- I. Statement signed by the Manufacturer of the synthetic safety surfacing attesting that all materials under this section shall be installed by the Manufacturer or its Certified Installers.
- J. A listing of at least twenty five (25) installations where products similar to those proposed for use have been installed and have been in successful service for a minimum period of three (3) years. This list shall include Owner or purchaser, address of installation, date of installation, contact person, and phone number.
- K. Upon request, a sample specimen of safety surface proposed for this project.
- L. Upon request, a list of all organizations and affiliations of the company offering the product(s).

1.05 DELIVERY, STORAGE and HANDLING:

Materials and equipment shall be delivered and/or stored in accordance with the Manufacturer's recommendations.

1.06 PROJECT SITE CONDITIONS:

- A. Synthetic safety surfacing shall be installed on a dry subsurface, with no prospect of rain within the initial drying period, at temperatures recommended by the Manufacturer.

No Fault Safety Surface & SAF DEK for Playgrounds

Product Specification

By No Fault Sport Group, LLC
2016 All Rights Reserved

All information contained within subject to change without notice

- B. Installation in weather condition of extreme heat, temperatures less than 40 degrees (F), and/or high humidity may impact cure time, and/or the structural integrity of the final product. Immediate surroundings of the site shall be reasonably free of dust conditions and poor particulate air quality will impact the final surface look.
- C. The Manufacturer's installation manager shall reserve the right to control the project schedule installation based on such factor without penalty to No Fault Sport Group, LLC.
- D. Safety surfacing shall be installed after the playground equipment is installed unless otherwise noted.
- E. Surface installation shall be coordinated by the project manager or designated individual of playground equipment and sub-base installation, with No Fault Sport Group's local production manager and in accordance with No Fault's sub-base requirements.

1.07 WARRANTY:

Surfacing shall maintain required impact attenuation characteristics and be guaranteed against defects in workmanship and material for a period of no less than five (5) years or as specified and agreed upon per contract.

PART 2 – PRODUCTS

Product shall be **No Fault Safety Surface** as manufactured and sold by No Fault Sport Group, LLC. No Fault Safety Surface shall consist of synthetic poured-in-place safety surfacing meeting the requirements of this specification and comprised of SBR, EPDM or TPV, and polyurethane binder. It shall be manufactured and installed by No Fault Sport Group, LLC (866-637-7678 www.nofault.com) and its certified installation crews.

NOTE – Other products will be allowed only if prior approved as per Section 2.02 Product Substitutions & Approved Equals

2.01 MATERIALS

- A. Polyurethane Binder
 - 1. Binder for safety surfacing shall be specifically designed for use with rubber granule material for outdoor installations.
 - 2. Binder is a single component polyurethane pre-polymer formulated using a polymeric foam of Diphenylmethane 4, 4' Diisocyanate (MDI), Amber Viscosity – 4500cps, NCO content – 9.0, Density – 20dc-68, PCF Flash Point - >390dF, Elongation – 550%, Tensile – 3900 lb./sq. in.
 - 3. No toluene diphenyl isocyanate (TDI) shall be used.
 - 4. No filler materials shall be used in urethane such as plasticizers and the catalyzing agent shall contain no heavy metals.
 - 5. Weight of polyurethane shall be no less than 8.5 lbs/gal (1.02 Kg/l) and no more than 9.5 lbs/gal (1.14 Kg/l)
 - 6. COLOR TINTED BINDER WILL NOT BE ALLOWED.
- B. SBR (Impact Layer)
 - 1. Only 100% shredded styrene butadiene rubber may be used
 - 2. Strands of SBR may vary from 0.5 mm – 2.0 mm in thickness by 3.0 mm – 20 mm in length.
- C. EPDM (Wear Surface)
 - 1. EPDM particles shall meet requirements of ASTM D 412 and CSA Z614-98 for tensile strength and elongation; and ASTM D 2240 (Shore A) hardness of 55-65, not less than 26 percent rubber hydrocarbons.
 - 2. EPDM shall be peroxide cured with an EPDM content of 26% and shall include a processing aid to prevent hardness with 26% poly content to maintain dynamic testing characteristics, weatherization and UV stability.
 - 3. Size of rubber particles shall be not less than 1.00 mm, or greater than 3.0 mm across with a minimum EPDM content of 25% by weight and certified letter from Manufacturer stating this content. All rubber shall remain consistent in gradation and size.
 - 4. STRAND, SHAVED, CHIPPED OR SHREDDED RUBBER IS NOT ACCEPTABLE IN THE POURED CAP.
- D. TPV (Wear Surface)
 - 1. TPV material shall be angular granules with a Shore A Hardness of 65A ±, a Tensile Strength equal to or greater than 3.0 Mpa, and an Elongation at Break greater than 400%.
 - 2. Size of TPV particles shall be not less than 1.00 mm, or greater than 4.0 mm across.
 - 3. STRAND, SHAVED, CHIPPED OR SHREDDED MATERIAL OF ANY TYPE IS NOT ACCEPTABLE.

No Fault Safety Surface & SAF DEK for Playgrounds

Product Specification

All information contained within subject to change without notice

By No Fault Sport Group, LLC

2016 All Rights Reserved

2.02 PRODUCT SUBSTITUTIONS & APPROVED EQUALS

- A. All product substitutions must be submitted for preapproval at least fourteen (14) days prior to bid opening date. A complete submittal package, as outlined in Section 1.03 Submittals, must be provided before a substitute product will be considered for preapproval. If the product submitted for preapproval cannot meet all requirements of the submittal package, it will not be considered.
- B. Once all products submitted for substitution have been reviewed, a list of the approved substitutes will be circulated and made available to bidders.

PART 3 – EXECUTION

3.01 SUB-BASE REQUIREMENTS

- A. Owner or Owner's representative shall provide sub-surface in accordance with Manufacturer's recommendation for the project location and application.
- B. The base shall be concrete, asphalt, or compacted stone installed in accordance with Manufacturer's written specifications.
- C. The base shall have the specific minimum slope (2%) and shall vary no more than 1/8" when measured in any direction with a 10' foot straight edge. Verify that sub-surfacing drainage, if required, has been installed to provide positive drainage.
- D. Tolerance of concrete or bituminous subsurface shall be within 1/8 inch (3.0 mm) in 10 feet (3050 mm). Tolerance of aggregate subsurface shall be within 3/8 inch (10mm) in 10 ft (3050 mm). Verify that aggregate subsurface has been fully compacted in 2" lifts to 95 percent or greater.
- E. Asphalt base shall be allowed to cure a minimum of fourteen (14) days and new concrete shall be allowed to cure a minimum of seven (7) days prior to commencement of surfacing.
- F. All sub-bases shall be approved by Owner or Owner's Representative prior to installation of the safety surface.
- G. Alternate sub-base material must have prior approval from Manufacturer.

3.02 PREPARATION

- A. Scheduling – No Fault Safety Surface shall be installed after other sub-contractors are complete, the area is free from pedestrian traffic, and under the conditions as outlined in Section 1.06 Project Site Conditions.
- B. Cleaning - The entire subsurface shall be clean, dry and free from any foreign and loose material.

3.03 INSTALLATION

- A. SBR Cushion Layer
 - 1. Polyurethane binder and SBR will be mixed on site in a rotating tumbler to ensure components are thoroughly mixed and are in accordance with manufactures recommendations.
 - 2. Binder shall be not less than 14 percent (14%), nor more than 20 percent (20%), of the total weight of rubber, and shall provide 100 percent (100%) coating of the particles.
 - 3. The SBR and binder mixture will then be poured-in-place by means of screeding, and hand-trowelled to maintain a seamless application.
 - 4. Installation method shall use a measured screed rod 1/16" thicker than the required depth.
 - 5. Whenever practical, SBR cushion layer shall be installed in one continuous pour on the same day. When a second pour is required, fully coat the edge of the previous work with polyurethane binder to ensure 100 percent bond with new work. Apply adhesive in small quantities so that new SBR mixture can be placed before the adhesive dries.
 - 6. Total depth of the safety surface system throughout the playground equipment use zone shall be as required to meet the applicable critical fall height requirements or as specified by Owner or Architect. Therefore, thickness of the SBR cushion layer will be total depth less 3/8" (minimum required thickness of the EPDM wear course layer).
 - 7. Edges - Surface edges shall be flush with edge of adjacent area or tapered to provide safe transition. When connecting to a concrete curb or border the hardened edge shall be primed with adhesive.
 - 8. The SBR cushion layer surface shall be porous.

No Fault Safety Surface & SAF DEK for Playgrounds

Product Specification

By No Fault Sport Group, LLC

2016 All Rights Reserved

All information contained within subject to change without notice

B. EPDM or TPV Wear Course Layer

1. Polyurethane binder and EPDM or TPV will be mixed on site in a rotating tumbler to ensure components are thoroughly mixed and are in accordance with manufactures recommendations.
2. The binder shall be not less than 20 percent (20%) of total weight of rubber used in the wear surface, and shall provide 100 percent (100%) coating of the particles.
3. The EPDM or TPV and binder mixture will then be poured-in-place by means of screeding, and hand-trowelled to maintain a seamless application.
4. Installation method shall use a measured screed rod 1/16" thicker than the required depth.
5. The cap will have a minimum weight of 2.2 pounds per square foot.
6. Thickness of wear surface shall be a minimum 3/8 inch.
7. The wear layer shall be porous.
8. If graphic designs and color transitions are used, they shall be full wear course depth. Color(s) to be determined by architect.
9. Edges - Surface edges shall be flush with edge of adjacent area or tapered to provide safe transition.
10. Large Areas - All areas in excess of 2,000 sq. ft. or that require adjacent color pours will have a cold joint or seam due to the nature of the installation process. Although seldom visible, large areas or adjacent colors require the No Fault Safety Surface material to be installed on separate days.
11. Color: The wear course shall be a blend of 50% Black and 50% Standard Color chosen by the architect or Owner during the submittal process, unless otherwise stated on plans.

3.04 PROTECTION

- A. The synthetic safety surface shall be allowed to fully cure in accordance with Manufacturer's instructions. The surface shall be protected by the Owner from all traffic during the curing period of 48 to 72 hours after surface installation is complete, or as instructed by the Manufacturer.
- B. Surface installation crew shall be responsible for the protection of No Fault Safety Surface during the installation process. Owner or General Contractor shall be responsible for the protection of the surface during the crew's off hours and during the curing period upon completion of the installation.

3.05 CLEAN UP

- A. Manufacturer's installers shall not leave adhesive on adjacent surface or play equipment. Spills of excess adhesive shall be promptly cleaned.
- B. Manufacturer's installers shall properly dispose of all material and packing waste before leaving the job site.
- C. Owner or contractor shall be responsible for supplying a dumpster at job site for all waste associated with installation of the safety surface.

FOR INDIVIDUAL PROJECT SPECIFICATIONS OR OTHER INFORMATION INCLUDING FALL HEIGHT REQUIREMENTS PLEASE CONTACT

NO FAULT SPORT GROUP, LLC

866-637-7678 (toll free)

WWW.NOFAULT.COM



TUV SUD America Inc.
Product Safety Services
47523 Clipper Drive
Plymouth, MI 48170
Phone: 734.455.4841

IPEMA Surfacing Material Report – ASTM F1292-09

Participant: No Fault Sport Group
Main Office Address: 3112 Valley Creek Dr, Suite C
Baton Rouge, LA 70808
Phone: (225) 215-7760
Manufacturing Location ID: Baton Rouge, LA
Commercial Name of product: No Fault Safety Surface TPV
Date of Manufacture: Unknown
No. of samples submitted: 3 - 18in. X 18in. PIP Tiles

TUV Report No.: QI1305028-3
Report Date: 5/16/2013
Test Date: 5/15/2013
Selection: ☐ Initial: ☒
Follow up ☐ Ref Job:
Sample Receipt Date: 5/14/2013
Ambient Air Temperature: 22.1°C
Humidity: 29.0%

Test Equipment:

Triax System 1:	<input checked="" type="checkbox"/>	Environmental Chamber No.:	<u>PLYP00101</u>
Triax System 2:	<input type="checkbox"/>	Calibration Due Date:	<u>7/31/2013</u>
Accelerometer ID:	<u>PLYP00089</u>	Environmental Chamber No.:	<u>PLYP00069</u>
Accelerometer Calibration Due Date:	<u>6/29/2013</u>	Calibration Due Date:	<u>7/31/2013</u>

Loose fill Material Sample Description:

Engineered Wood Fiber:	<input type="checkbox"/>	Un-compacted Depth:	<u> </u> Inches
Loose Fill Wood:	<input type="checkbox"/>		
Rubber:	<input type="checkbox"/>		
Sand:	<input type="checkbox"/>	Compacted Depth:	<u> </u> Inches
Gravel:	<input type="checkbox"/>		
Other:	<input type="checkbox"/>		

Unitary Sample Description:

Tiles	<input type="checkbox"/>	Total Thickness:	<u>3.5in.</u>
Poured in Place	<input checked="" type="checkbox"/>	Top Layer:	<u>0.5in.</u>
Other	<input type="checkbox"/>	Base Layer:	<u>3.0in.</u>

Comments:

The above described sample was tested at : 8 Ft.

The results reported herein reflect the performance of the above described samples at the time of testing and at the temperature(s) reported. The results are specific to the described samples. Samples of surfacing materials that do not closely match the described samples will perform differently. The following data sheet provides an accurate representation of the test results.

Sample in compliance with ASTM F1292-09 at the temperature and rating specified? Yes ☒ No ☐

Signature: Timothy Fournier

Date: 5/16/13

Reviewed by: Scott B. Smith

Date: 5/20/13

Client: No Fault Sport Group

TUV Report No.

QH1305028-3Manufacturer: No Fault Sport Group


Test Date:

5/15/2013

Drop	Specified Impact Height (ft.)	Reference Temperature -6°C, (21.2°F)				Reference Temperature 23°C, (73.4°F)				Reference Temperature 49°C, (120.2°F)				
		G-Max	HIC	Velocity (ft/s)	Theoretical Drop Height (ft.)	G-Max	HIC	Velocity (ft/s)	Theoretical Drop Height (ft.)	G-Max	HIC	Velocity (ft/s)	Theoretical Drop Height (ft.)	
1	8	133	871	22.7	8.011	127	789	22.7	8.011	131	840	22.7	8.011	
2	8	137	902	22.8	8.081	134	860	22.8	8.081	137	888	22.8	8.081	
3	8	134	870	22.8	8.081	133	839	22.8	8.081	138	908	22.8	8.081	
Average		135.5	886			133.5	849.5			137.5	898			
Measured Surface Temperature		(-6°C)	Max. Change from reference + 5°C, (5°F)				23°C	Max. Change from reference ± 3°C, (5°F)				49°C	Max. Change from reference -3°C, (-5°F)	
Sample Condition:		DRY				DRY				DRY				

Drop	One foot over (Ft.)	Reference Temperature -6°C, (21.2°F)				Reference Temperature 23°C, (73.4°F)				Reference Temperature 49°C, (120.2°F)			
		G-Max	HIC	Velocity (ft/s)	Theoretical Drop Height (ft.)	G-Max	HIC	Velocity (ft/s)	Theoretical Drop Height (ft.)	G-Max	HIC	Velocity (ft/s)	Theoretical Drop Height (ft.)
1					0.000				0.000				0.000
2					0.000				0.000				0.000
3					0.000				0.000				0.000
Average		0	0			0	0			0	0		
Measured Surface Temperature		°C	Max. Change from reference + 5°C, (5°F)			°C	Max. Change from reference ± 3°C, (5°F)			°C	Max. Change from reference -3°C, (-5°F)		
Sample Condition:													

Drop	One foot under (Ft.)	Reference Temperature -6°C, (21.2°F)				Reference Temperature 23°C, (73.4°F)				Reference Temperature 49°C, (120.2°F)				
		G-Max	HIC	Velocity (ft/s)	Theoretical Drop Height (ft.)	G-Max	HIC	Velocity (ft/s)	Theoretical Drop Height (ft.)	G-Max	HIC	Velocity (ft/s)	Theoretical Drop Height (ft.)	
1					0.000				0.000				0.000	
2					0.000				0.000				0.000	
3					0.000				0.000				0.000	
Average		0	0			0	0			0	0			
Measured Surface Temperature		°C	Max. Change from reference + 5°C, (5°F)			°C	Max. Change from reference + 3°C, (5°F)			°C	Max. Change from reference -3°C, (-5°F)			
Sample Condition:														

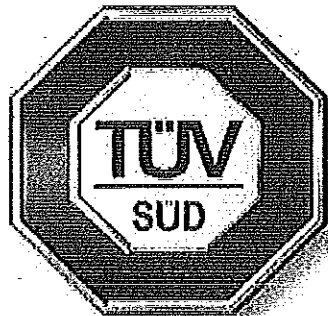

America

McNamara, Kayla

From: Mark Gallagher <Mark@nerecgroup.com>
Sent: Thursday, December 08, 2016 2:40 PM
To: McNamara, Kayla
Subject: Haskell Field Playground- PIP Sub base specification
Attachments: NFSS Stone Base Requirements 2016.pdf

Kayla

Please see the attached spec for the PIP sub base material and install per manufacturer recommendations.

Mark Gallagher
NERG



NO FAULT SAFETY SURFACE
COMPACTED STONE BASE REQUIREMENTS

1. **DEPTH**

4" minimum thickness - to be determined by local soil conditions.

2. **SLOPE**

Stone elevation shall maintain slope to drains or toward low end. Base must exhibit positive drainage in all areas.

3. **GEOTEXTILE FABRIC**

Woven geotextile fabric is recommended. Place the geotextile fabric on the smooth and sloped subgrade. Fabric should be stretched as tight and as flat as possible. Fabric should be overlapped a minimum of 12 inches.

4. **COMPACTION**

Density requirement is 95% compaction with final condition of stone as level and stable so as not to shift when traveled on or during rubber surface installation process.

5. **POROSITY**

Stone base course shall maintain porosity for direct drainage. Care must be taken not to choke off porosity.

6. **ENCLOSURE**

Stone base course shall be surrounded by a retaining curb.

Example #1: For a 2" system, top-of-curb elevation shall be 2" above top-of-compacted stone elevation.

NOTE: As the No Fault Safety Surface depth changes, so shall the difference between top of curb and top of compacted stone.

Example #2: If the No Fault Safety Surface is to cover the retaining curb, the compacted stone base shall be flush/even with the top of the curb.

7. **DRAINAGE**

Subsurface drainage is recommended under and around a stone base. Perforated pipe or similar system is acceptable. **Positive drainage in all areas is required.**

8. **STONE SELECTION**


Different size stone as described below is critical to the long term performance and durability of the stone base. Stone shall be uniformly mixed in an approving pug mill or on a mixing table or by other mechanical means (such as quarry blending operations) prior to placement on the subgrade. Test samples will be taken after mixing, and the material shall conform to specified requirements prior to placement on the subgrade. The material shall be wetted during mixing operations if necessary for proper blending.

9. **STONE GRADATION**

<u>U.S. Sieve</u>	<u>Percent Passing</u>
1"	100
3/4"	90 - 100
No. 4	35 - 60
No. 30	10 - 30
No. 200	2 - 9


NOTE: Although No Fault Sport Group shall advise owner and/or prime contractor if a deficiency in work-by-others is discovered, No Fault accepts no responsibility for work-by-others. It is the owner and/or prime contractor's responsibility to ensure the accuracy of work not executed by No Fault Sport Group. Prime Contractor and Owner agree to release No Fault Sport Group from responsibility to repair defects that are the result of defects in the base/subgrade.

Compacted Stone Base Requirements No Fault Safety Surface

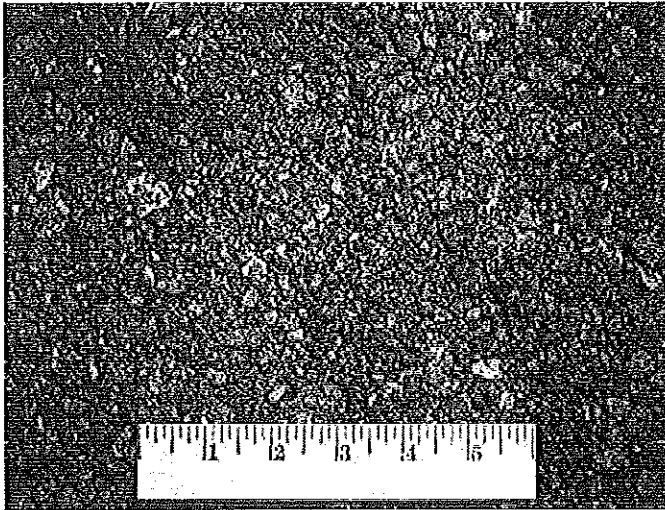

Description

Minus 1" Screened Millings are made by processing milled asphalt from road building projects through a 1 inch screen. The resulting 1 inch and smaller product is ideal for constructing a sub-base for playground surfaces when properly prepared with 95% compaction.

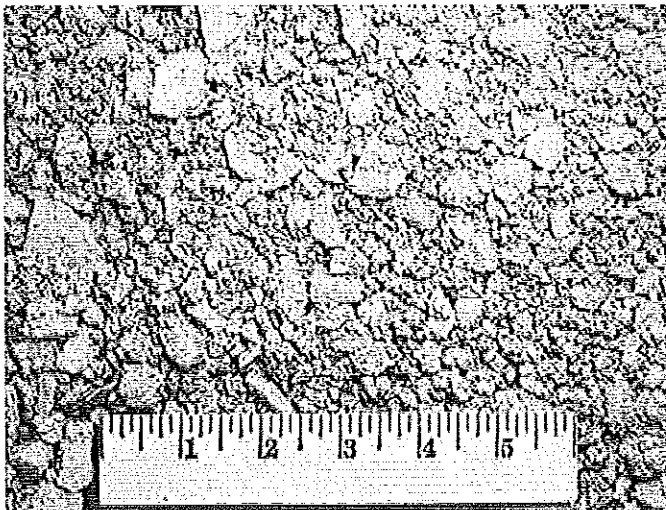

Description

Minus 1" Crusher Run Limestone is produced by crushing blasted Limestone and reducing everything to 1 inch and smaller. The result is a highly compactable subbase that is ideal for constructing a sub-base for playground surfaces with 95% compaction as recommended. Its gray color is visually distinct. Crusher Run Limestone is readily available in all areas. Therefore the cost of importing it to your job makes it a little more costly than gravel products.

McNamara, Kayla

From: Mark Gallagher <Mark@nerecgroup.com>
Sent: Thursday, December 08, 2016 2:27 PM
To: McNamara, Kayla
Subject: Haskell Field Playground- PIP Information
Attachments: NFSS - Playground Flyer (2015).pdf; NFSS - Color Chart (2015).pdf

Kayla


Please find attached the product brochure from NO FAULT our PIP Rubber Manufacturer and Installation company we represent here in Massachusetts and the New England Region.

I will be forwarding the additional specification information you requested as well.

Any questions let me know.


Thank you!

Mark Gallagher
New England Recreation Group
800-861-1209

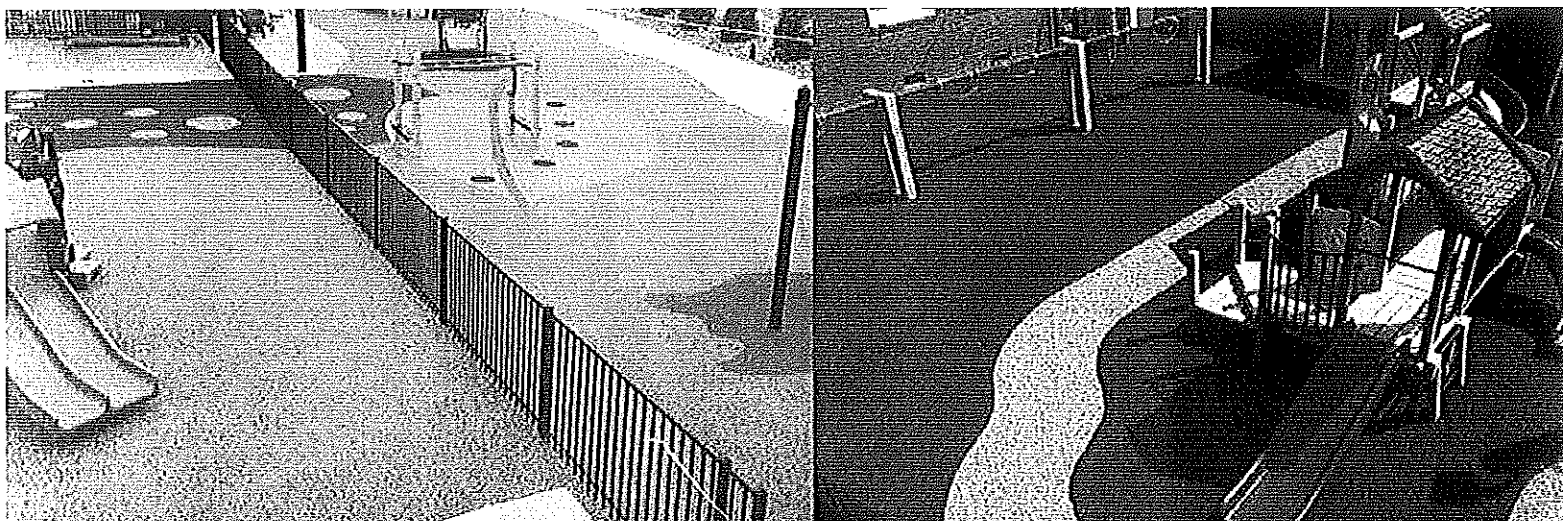


Safety Surface

Traditional Poured-in-Place for Playgrounds

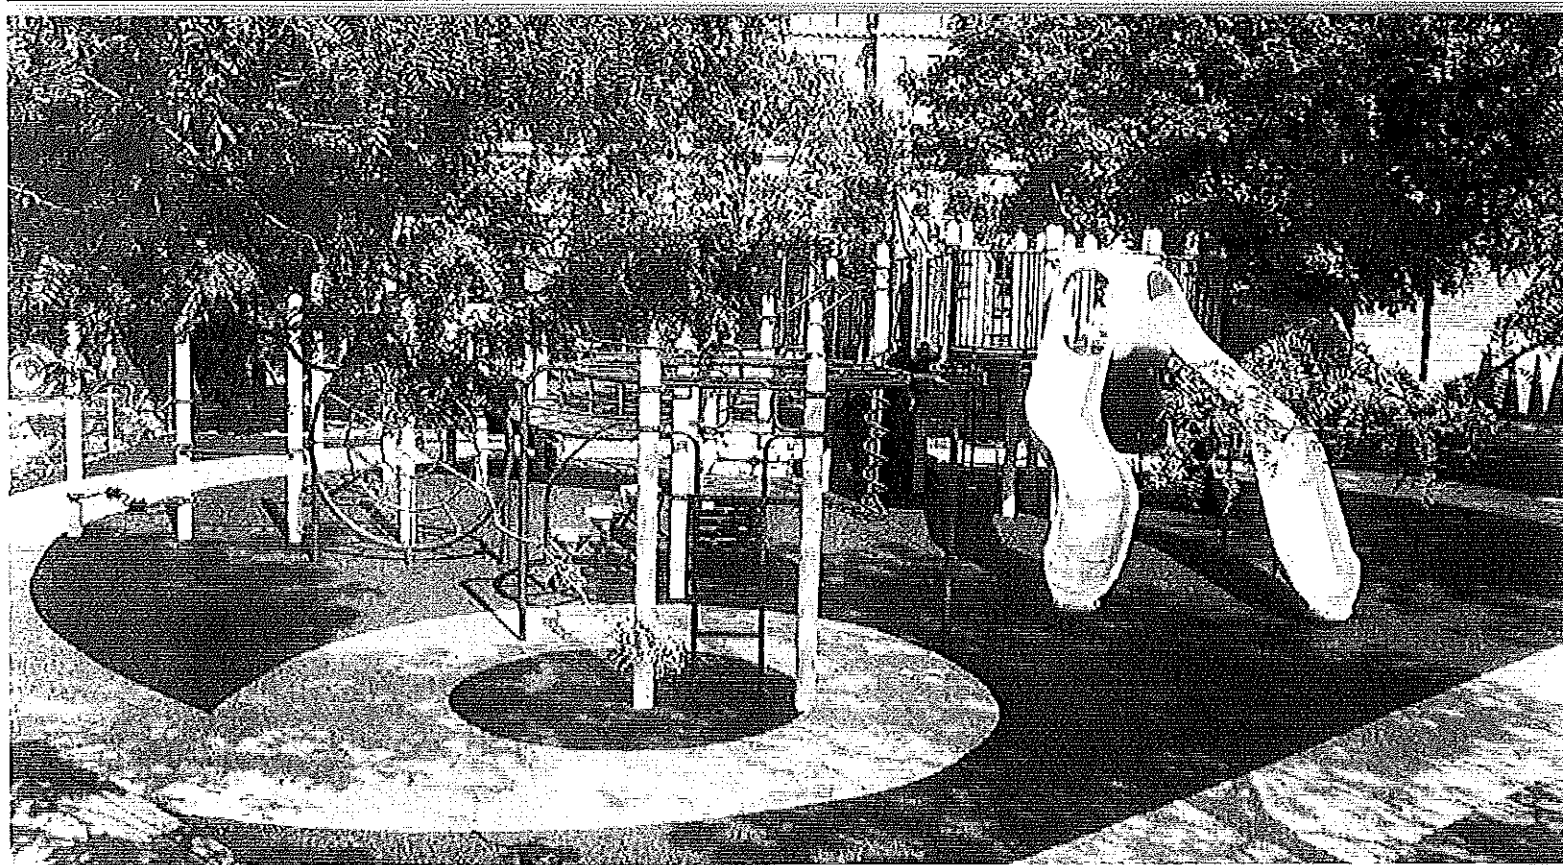

No Fault

1-800-232-7766 • www.nofault.com

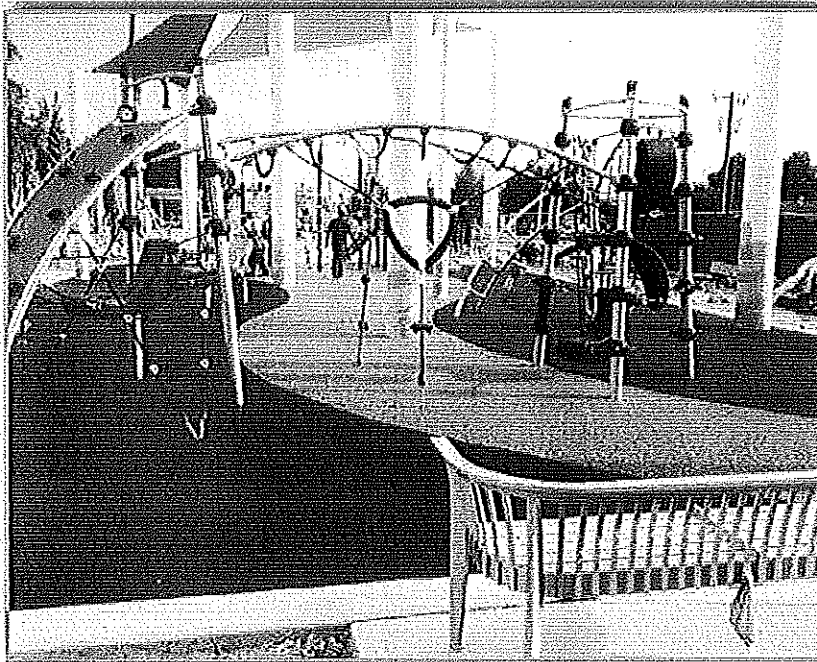

No Fault Safety Surface for Playgrounds

No Fault Safety Surface is comprised of the **highest quality EPDM or TPV rubber granules** blended with a polyurethane binder. NFSS is poured-in-place and professionally installed on site as a 2-layer system for playgrounds. The bottom layer is the **Impact absorbing layer** made of clean, recycled rubber buffing. The top layer is the decorative wear layer comprised of **virgin rubber EPDM or TPV granules**. The wear layer is available in an abundance of color options that can be laid into patterns or mixed to create different shades of color.

No Fault Safety Surface (NFSS) Playground System is **engineered on site** by our Certified Installation Crew, **utilizing our exclusive hand trowelling and screed rod method**.

The complete No Fault Safety Surface System provides you with a **resilient, porous and seamless** playground safety surface that is known to be the **absolute best playground safety surface available** for fall protection and ADA accessibility.

No Fault Sport Group provides **coast-to-coast installation service** to ensure **consistent quality** and **premium customer service** for all of our poured-in-place surfaces!



1-800-232-7766
www.nofault.com

Features & Benefits

- IPEMA Certified
- CPSC Compliant
- LEED Compliant
- OSHA Certified
- Custom Inlaid Graphic Designs
- Proven Long-Term Performance
- Low Maintenance
- Green, Recycled and Environmentally Friendly
- Freeze & Thaw Resistant


Characteristics

- Provides a Seamless and Accessible Play Surface
- Tested and Proven to Provide Fall Protection up to 12'
- Safe, Porous and Slip Resistant, Even When Wet!

Fall Height Chart	
DEPTH	Fall Height
1.75"	4'
2.25"	5'
2.5"	6'
3"	7'
3.5"	8'
4.5"	9'
5"	10'
6.5"	12'



To verify product certification, visit www.ipema.org



No Fault Safety Surface


Traditional Poured-in-Place for Playgrounds




www.nofault.com

COLOR CHART


Standard Color Blends

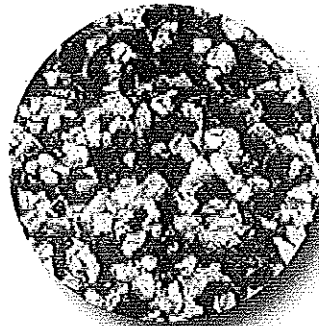


50% Tan 50% Black

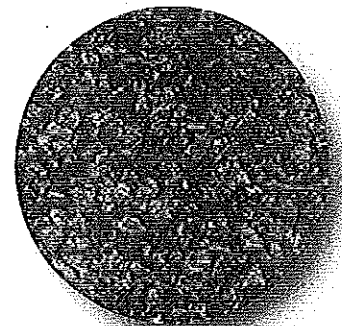

50% Terra Cotta 50% Black

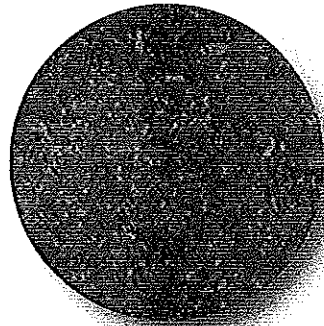


50% Blue 50% Black

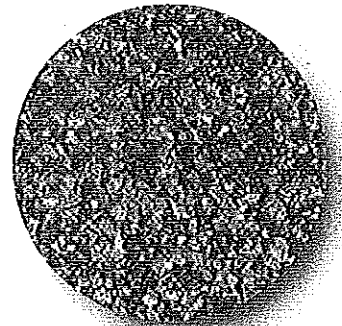


50% Green 50% Black

Available Colors:



Brown




Tan



Teal



Purple



Yellow



Gold



Light Blue



Blue



Light Green



Green



Terra Cotta



Orange

The color as shown on the color chart will not be an exact match to the product in the field.

